



RDL[®]
Radio Design Labs

SPECIALISTS IN PRACTICAL PRECISION ENGINEERING™

STICK-ON[®] SERIES

Model ST-NG1

Random Noise Generator

ANYWHERE YOU NEED...

- True *Random* Noise Source
- Masking Noise Sources
- Pink Noise
- White Noise
- Mic and/or Line Level Noise Signals

You Need The ST-NG1!



The ST-NG1 is part of the group of versatile STICK-ON products from Radio Design Labs. STICK-ONs feature the advanced circuitry for which RDL products are known, combined with unequalled versatility in mounting possibilities. The durable adhesives provided with the ST-NG1 permit permanent or removable mounting. Numerous available mounting accessories, brackets and rack-mount chassis are optionally available to facilitate any system design.

APPLICATION: The ST-NG1 is the ideal choice where random white or pink noise is needed. It is suitable either as a reference noise source for audio measurements; or as a masking noise source in engineered sound or counter-intelligence applications, particularly where true *random noise* is required.

Amplitude limiting circuitry in the ST-NG1 controls extreme peak excursions while preserving random variations of at least 20 dB. The noise generating circuitry in the ST-NG1 is truly random analog noise occupying the full bandwidth from 20 Hz to 20 kHz. This makes the ST-NG1 ideal in masking environments where secure, random noise is required. Unlike the typical digitally-generated pseudo-random noise generators, which can be decoded and removed by effective intelligence equipment, the ST-NG1 produces no repetitive frequency or amplitude pattern.

Four outputs are available on the ST-NG1. Both a mic-level and line-level output are provided from each noise source. A 25-turn gain-trimming potentiometer is provided for the white noise. A separate 25-turn gain-trimming potentiometer is provided to set the pink-noise level, independent of the white-noise setting. The gain trim for each noise source adjusts both the line and mic output for that source. Each output is balanced low-impedance, and may be wired either balanced or unbalanced. All outputs may be used simultaneously.

Wherever white or pink noise signals are needed, the ST-NG1 is the ideal choice. Use the ST-NG1 individually, or combine it with other RDL RACK-UP[®], STICK-ON[®], TX[™], or FLAT-PAK[™] series products as part of a complete audio/video system.

RDL®

Radio Design Labs

SPECIALISTS IN PRACTICAL PRECISION ENGINEERING™

STICK-ON® SERIES

ST-NG1



Random Noise Generator

Installation/Operation



EN55103-1 E1-E5; EN55103-2 E1-E4

Typical Performance reflects product at publication time exclusive of EMC data, if any, supplied with product. Specifications are subject to change without notice.

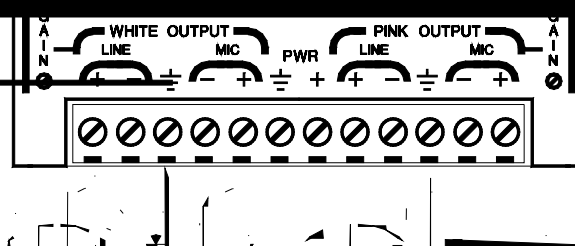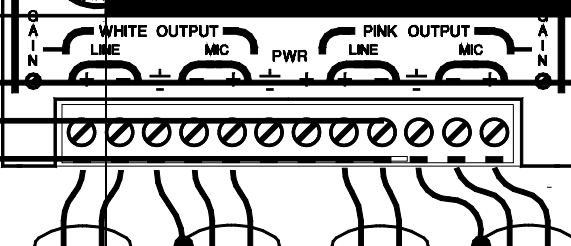

SIGNAL
FEEDING
UNBAL
LINE-LEVEL
EQUIPMENT

PINK NO



(adjustable)
adjustable
Simultaneous
@ 30 mA
1.5 in. 3.94
1.0 in. 7.62
0.5 in. 1.65